

VELVET Mini Power 1 IP54

Ref.: VMP1IP54VLDMX

Datasheet: June 2021 / Page 1



Bicolor weatherproof compact panoramic concentrated light LED panels

[Click here for more product information](#)

VMP1IP54VLDMX includes: integrated Vlock mount, DMX in XLR-5 connector, 1x yoke with 28mm junior pin - 16mm baby receiver



1. Power switch
2. Docking plate
3. +/- Adjustment buttons
4. 3200K / 5600K Quick access button
5. Mode selection button (Dimmer / Colour Temperature)
6. Digital display
7. XLR-5 DMX RDM In & Out connector



VELVET Mini Power 1 IP54


Ref.: VMP1IP54VLDMX

Datasheet: June 2021 / Page 2



| | |
|-----------------------------------|--|
| COLOUR TEMPERATURE | adjustable from 2700K to 6500K in 100K steps |
| LIGHT INTENSITY | dimnable 0 to 100, smooth and flicker-free |
| TLCI INDEX | 95 at 3200K and 98 at 5600K |
| DIMENSIONS | 345 x 190 x 90 mm (panel) 13.6"x7.5"x3.5" 405 x 275 x 90 mm (panel + yoke) 16"x 10.8" x 3.5" |
| WEIGHT | 2 kgs / 4.4 lbs (panel) 2.3 kgs / 5 lbs(panel + yoke) |
| POWER DRAW | 70 W |
| POWER SUPPLY | 12 – 35 VDC through Vock or Gold battery mount plate 90-264 VAC 50/60Hz through Smart Vlock or Gold AC adapter |
| BEAM ANGLE | 35° |
| PHOTOMETRICS | 5000 lux / 463 fc at 1m / 3 feet 600 lux / 55 fc at 3m / 10 feet |
| LED RATED LIFE | more than 50.000 hours L70 |
| POWER CONNECTION | Vock or Gold battery mount plate |
| DMX | DMX-RDM with XLR-5 in connector |
| OUTPUT FREQUENCY | 16KHz flicker-free up to 2000fps |
| OPERATION TEMPERATURE | from -20°C to +40°C |
| COOLING | no-noise, fan-free passive cooling |
| PROTECTION | IP54 weatherproof, indoor or outdoor use |
| VELVET LED TECHNOLOGY | selected BIN high-power LED+custom optics+optic diffuser+CPU software control |
| RIGGING OPTIONS | aluminum yoke with 16 baby receiver combined with 28 junior pin, multiple ¼-20"rigging points, multipanels yokes, pole-operated studio yoke |
| QUICK MOUNTING ACCESSORIES | Smart Vlock AC power supply, quarter, half and full hard diffusion, foldable Snapgrid, removable barn doors, remote control, cordura case, hard case |
| CONSTRUCTION & FINISH | Made of black powdercoated extruded and sheet aluminum |

WIRE VIEW

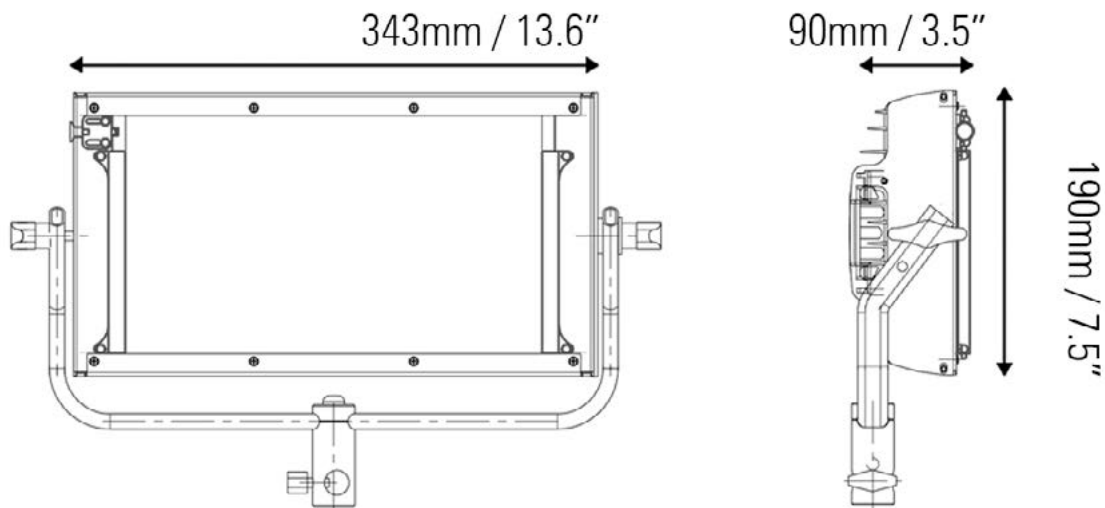




VELVET Mini Power 1 IP54

Ref.: VMP1IP54VLDMX


Datasheet: June 2021 / Page 3



PHOTOMETRICS

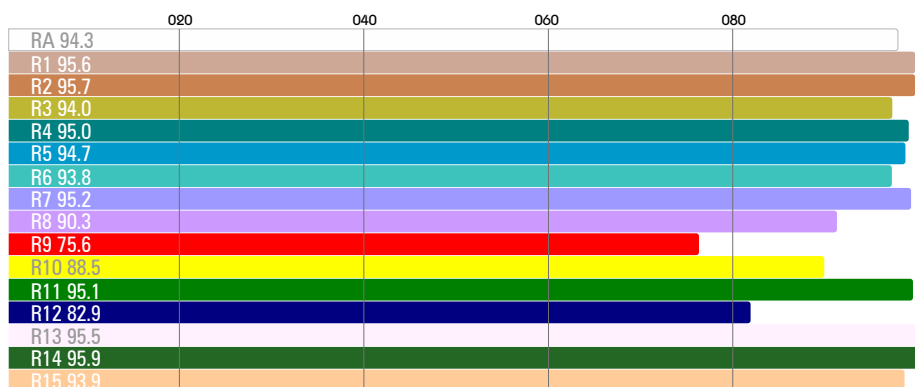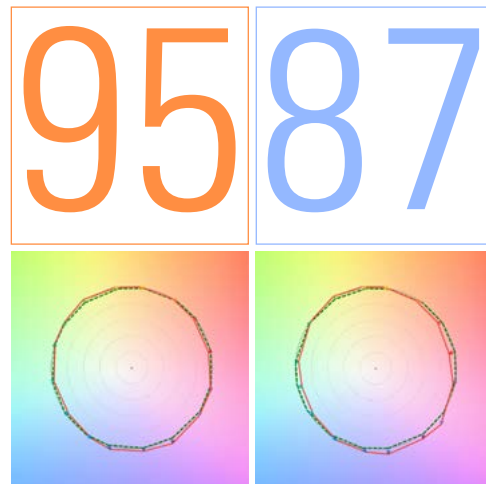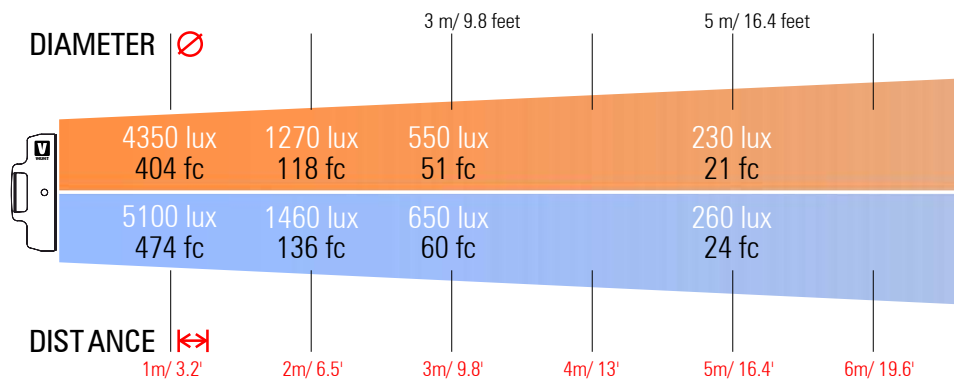

CCT 3294K

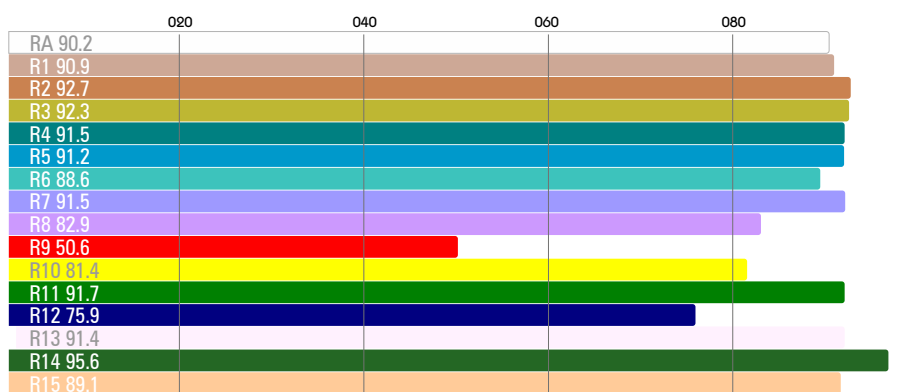

CCT 5644K

VELVET Mini Power 1 IP54

Ref.: VMP1IP54VLDMX

Datasheet: June 2021 / Page 4



ACCESSORIES

POWER SUPPLY



VM1-PSU65WVL




VM1-PSU65WGL

REMOTE CONTROL



VL-RC

BEAM CONTROL



VMP1-D25



VMP1-D50



VMP1-D100



VM1-RB



VM1-SG

TRANSPORT



VM1-BAG



VM1-DBAG



VL1-TBAG



VL1-CASE